



Motores IR3 8 PL

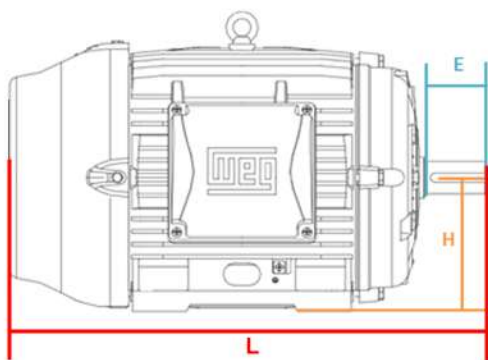

Motores W22 IR3 Trifásicos - IP55 - 60 Hz

8 PL (900 rpm)

CV	kW	Carcaça	H (mm)	L (mm)	E (mm)	F (mm)	G (mm)	Ø D (mm)	GD (mm)	Rolamento Dianteiro	Rolamento Traseiro	Massa (kg)	*Corrente Nominal In (A) em 220 V
0,16	0,12	71	71	250	30	5	11,00	14j6	5	6202 ZZ	6202 ZZ	9,5	1,080
0,25	0,18	80	80	277	40	6	15,50	19j6	6	6204 ZZ	6203 ZZ	14,1	1,190
0,33	0,25	80	80	277	40	6	15,50	19j6	6	6204 ZZ	6203 ZZ	14,5	1,53
0,5	0,37	90S	90	305	50	8	20,00	24j6	7	6205 ZZ	6204 ZZ	19,5	2,25
0,75	0,55	90L	90	329	50	8	20,00	24j6	7	6205 ZZ	6204 ZZ	23,0	3,25
1	0,75	L90L	90	360	50	8	20,00	24j6	7	6205 ZZ	6204 ZZ	25,0	4,34
1,5	1,1	100L	100	376	60	8	24,00	28j6	7	6206 ZZ	6205 ZZ	33,2	5,86
2	1,5	112M	112	394	60	8	24,00	28j6	7	6207 ZZ	6206 ZZ	45,6	7,06
3	2,2	132M	132	489	80	10	33,00	38k6	8	6308 ZZ	6207 ZZ	79,0	9,32
4	3	132M	132	489	80	10	33,00	38k6	8	6308 ZZ	6207 ZZ	86,0	12,70
5	3,7	132M/L	132	515	80	10	33,00	38k6	8	6308 ZZ	6207 ZZ	90,0	15,60
6	4,5	160M	160	598	110	12	37,00	42k6	8	6309 C3	6209 Z-C3	117,0	19,30
7,5	5,5	160M	160	598	110	12	37,00	42k6	8	6309 C3	6209 Z-C3	134,0	23,00
10	7,5	160L	160	642	110	12	37,00	42k6	8	6309 C3	6209 Z-C3	148,0	31,00
12,5	9,2	180M	180	664	110	14	42,50	48k6	9	6311 C3	6211 Z-C3	169,0	34,00
15	11	180L	180	702	110	14	42,50	48k6	9	6311 C3	6211 Z-C3	185,0	40,60
20	15	180L	180	702	110	14	42,50	48k6	9	6311 C3	6211 Z-C3	196,0	54,40
25	18,5	200L	200	767	110	16	49,00	55m6	10	6312 C3	6212 Z-C3	247,0	70,20
30	22	225S/M	225	886	140	18	53,00	60m6	11	6314 C3	6314 C3	367,0	77,20
40	30	225S/M	225	886	140	18	53,00	60m6	11	6314 C3	6314 C3	400,0	105,00
50	37	250S/M	250	965	140	18	58,00	65m6	11	6314 C3	6314 C3	463,0	128,00
60	45	250S/M	250	965	140	18	58,00	65m6	11	6314 C3	6314 C3	485,0	154,00
75	55	280S/M	280	1071	140	20	67,50	75m6	12	6316 C3	6316 C3	682,0	191,00
100	75	280S/M	280	1071	140	20	67,50	75m6	12	6316 C3	6316 C3	741,0	260,00

*Para obter os valores da corrente nominal (In) em outras tensões, utilizar os seguintes fatores de multiplicação: 380 V - 0,577; 440 V - 0,5